




NV-8PS42-PVD Power Supply StubEQ™ Receiver DA Hub


Network Video Technologies

Power



NV-8PS42-PVD POWER SUPPLY STUB EQ™ RECEIVER DA HUB FRONT VIEW


OUTPUTS: 28V~1A MAX PER PORT 8A MAX TOTAL
CAMERA POWER IN CLASS 2 WIRING (SELV) ONLY

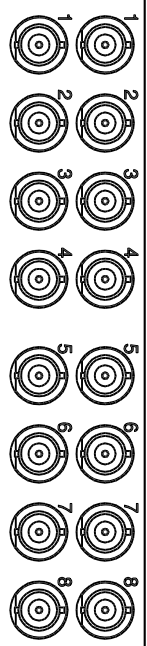

Control Room Data
CH 1-4 CH 5-8


NV-8PS42-PVD POWER SUPPLY STUB EQ™ RECEIVER DA HUB REAR VIEW

ON FOR CONTINUED PROTECTION AGAINST THE RISK OF FIRE,
REPLACE ONLY WITH THE SAME TYPE AND RATING OF FUSE.

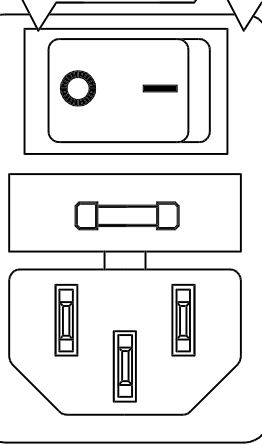

INPUT: 250 WATTS FUSE: RATED 250 V 5A1

ON FOR CONTINUED PROTECTION AGAINST THE RISK OF FIRE,
REPLACE ONLY WITH THE SAME TYPE AND RATING OF FUSE.



INPUT: 250 WATTS FUSE: RATED 250 V 5A1